



HawkeyePedershaab

## Lever-Lok HIGH PERFORMANCE DOUBLE CAGE SPACER

### Positively positions double cage reinforcement!

HawkeyePedershaab's patented lever-applied locking technology brings a new dimension in spacing performance to double cage concrete pipe. Unlike conventional spacers, the performance of the Lever-Lok is not dependent on the accuracy of the rolled cages. You get dependable and positive cage placement in the toughest applications.

### Dependable, double-lock grip!


The Lever-Lok surrounds the vertical of the inner cage and encircles the circumferential of the outer cage. When applied to the cage, the Lever-Lok clamps to each cage under constant spring tension. Movement of the inner and outer cages is completely restricted.

### Simple to install!


The Lever-Lok installs to the cages in seconds with a simple lever tool. Place the non-spacing end of the Lever-Lok around the longitudinal wire of the inner cage and rotate 90°. Insert the lever tool through the spacing end and pull down, pivoting against the outer cage, until the Lever-Lok snaps into place.

### Improves pipe quality!


Dislodged spacers disturb cage placement which can reduce pipe strengths and expose the reinforcing steel. The Lever-Lok's patented design assures a tight fit for dependable performance under the toughest conditions.



1. Hook Lever-Lok tail around inner cage longitudinal wire then snap the spacing eye over outer cage circumferential wire.  
Inner Cage




2. With the end of the Lever-Lok tool bearing against the circumferential wire pull down. When the offset hook is under the circumferential wire, release tool. The Lever-Lok will lock into position.  
Inner Cage



Dependable, double-lock grip

Simple Installation

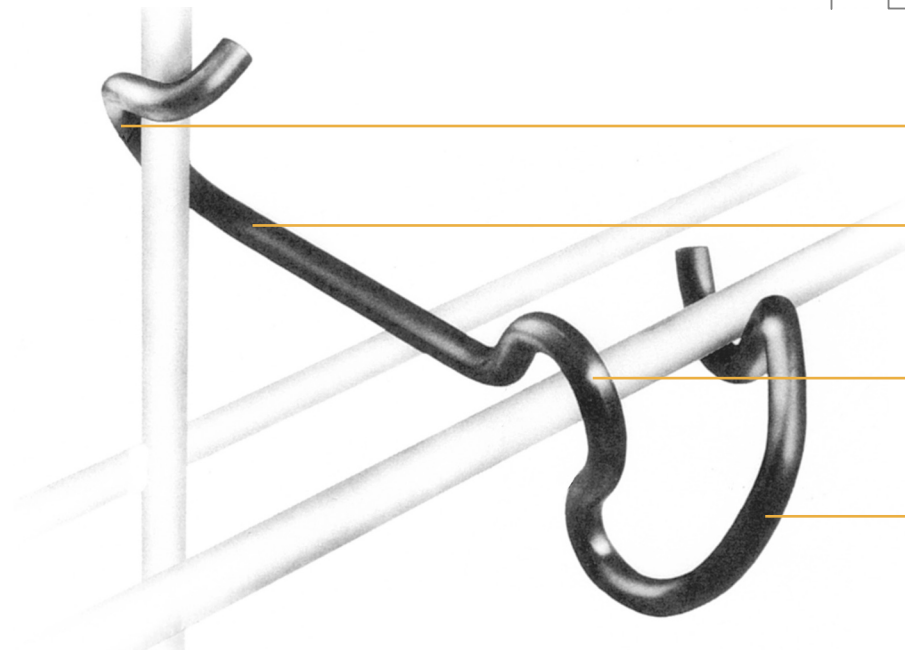

Standard sizes available for a wide range of B and C wall thicknesses.

Circumferential wire of inner cage is surrounded to restrict cage movement in both directions.

Special detents hold spacer in position until lever-locked.

Spacing end assures the required ASTM 1" of concrete cover. 1 1/4" cover also available.

Afinitas Concrete Accessories Division 506 Wapello St. Mediapolis, IA 52637  
319-394-3197 or 800-626-1451 • [info@afinitas.com](mailto:info@afinitas.com) • [www.afinitas.com](http://www.afinitas.com)

