


Coil Bolt

Coil Bolts have self-cleaning threads designed to match Coil Threaded Inserts, Coil Nuts, and to be used in associative applications. Coil Bolts can be reused but will wear and should be maintained and inspected in-between and before uses to ensure safety.

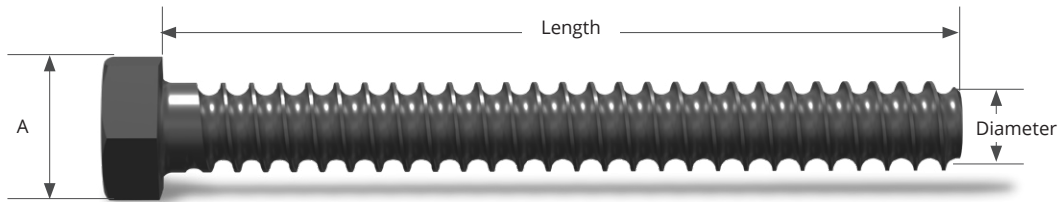

CB12412P

Item #	Diameter	Length	Finish	A	TPI	Weight (lbs)	SWL	Safety Factor	UML/T
1/2" Coil Bolt									
CB12112P	1/2	1 1/2	Plain	3/4	6	.11	1650	5:1	8250
CB122P	1/2	2	Plain	3/4	6	.13	1650	5:1	8250
CB12212P	1/2	2 1/2	Plain	3/4	6	.15	1650	5:1	8250
CB123P	1/2	3	Plain	3/4	6	.17	1650	5:1	8250
CB12312P	1/2	3 1/2	Plain	3/4	6	.19	1650	5:1	8250
CB124P	1/2	4	Plain	3/4	6	.22	1650	5:1	8250
CB12412P	1/2	4 1/2	Plain	3/4	6	.24	1650	5:1	8250
CB125P	1/2	5	Plain	3/4	6	.35	1650	5:1	8250
CB126P	1/2	6	Plain	3/4	6	.30	1650	5:1	8250
3/4" Coil Bolt									
CB342P	3/4	2	Plain	1 1/8	4.5	.33	3600	5:1	18000
CB34212P	3/4	2 1/2	Plain	1 1/8	4.5	.39	3600	5:1	18000
CB343P	3/4	3	Plain	1 1/8	4.5	.43	3600	5:1	18000
CB344P	3/4	4	Plain	1 1/8	4.5	.53	3600	5:1	18000
CB346P	3/4	6	Plain	1 1/8	4.5	.73	3600	5:1	18000
1" Coil Bolt									
CB14P	1	4	Plain	1 1/2	3.5	1.00	7200	5:1	36000
CB16P	1	6	Plain	1 1/2	3.5	1.36	7200	5:1	36000

Material High Strength Steel

SWL Safe Working Load

UML/T Ultimate Mechanical Load in Tension (lbs)