


Coil Nut


Coil Nuts are designed to be used with Amifast Coil Bolts. To achieve the listed safe working load, two (2) Coil Nuts should be locked tightly together. If using the High Coil Nut, only one (1) Coil Nut will be needed to achieve the listed safe working load.



CN12H



CN12P

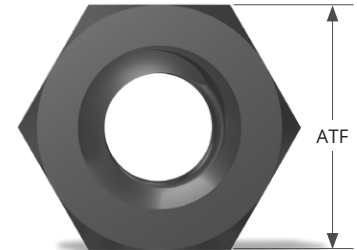

CN12P

Item #	Diameter	Height	Finish	ATF	TPI	Weight (lbs)	SWL	Safety Factor	UML/T
Standard Coil Nut									
CN12P	1/2	4/9	Plain	7/8	6	.06	1800	5:1	9000
CN34FIN	3/4	5/8	Plain	1 1/8	4.5	.18	3600	5:1	18000
CN34P	3/4	5/8	Plain	1 1/4	4.5	.18	3600	5:1	18000
CN1P	1	1	Plain	1 5/8	3.5	.42	7200	5:1	36000
CN114P	1 1/4	1 1/4	Plain	2	3.5	.76	10800	5:1	54000
CN112P	1 1/2	1 1/2	Plain	2 3/8	3.5	1.26	16200	5:1	81000
High Coil Nut									
CN12H	1/2	1 3/16	Plain	7/8	6	.30	3600	5:1	18000
CN34HFIN	3/4	1 3/16	ZP	1 1/8	4.5	.28	7200	5:1	36000
CN34H	3/4	1 3/16	Plain	1 1/4	4.5	.32	7200	5:1	36000
CN1H	1	2	Plain	1 5/8	3.5	.68	15000	5:1	75000

ZP Zinc Plated
 ATF Across The Flats
 TPI Threads Per Inch

SWL Safe Working Load
 UML/T Ultimate Mechanical Load in Tension (lbs)