Erection Head Anchor

The Amifast Erection Head Anchor is designed for lifting and handling of thin-walled precast elements. The anchor accepts both tension and shear bars and when used will provide the respective capacities shown below. A tension bar should be used in all applications.

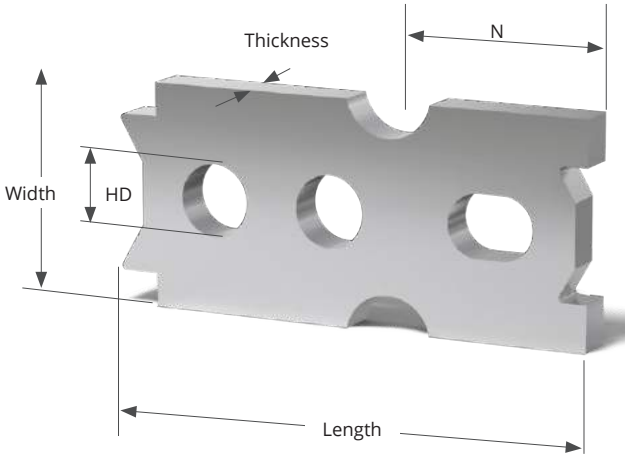

PLEHA2T

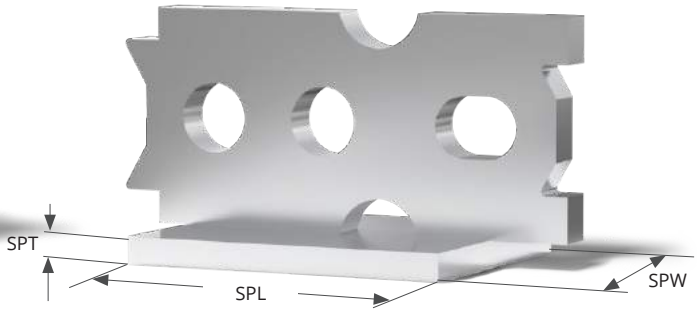

PLEHA2TSP

Item #	Size (T)	Length	Width	Thick-ness	Weight (lbs)	N	HD	SPL	SPW	SPT	Lifting Clutch	Recess Former	SWL	Safety Factor	UML/T
Erection Head Anchor															
PLEHA2T	2T	4 3/8	2	3/8	0.74	1 13/16	5/8				PLRC23T	PLRM2	4000	4:1	16000
PLEHA4T	4T	7 7/16	2 1/2	5/8	2.69	2 1/2	3/4				PLRC46T	PLRM46	8000	4:1	32000
Erection Head Anchor with Shear Plate															
PLEHA2TSP	2T	4 3/8	2	3/8	1.59	1 13/16	5/8	3	2 1/2	1/4	PLRC23T	PLRM2	4000	4:1	16000
PLEHA4TSP	4T	7 7/16	2 1/2	5/8	3.51	2 1/2	3/4	3	2 1/2	3/8	PLRC46T	PLRM46	8000	4:1	32000
PLEHA8TSP	8T	13 1/4	3 3/4	13/16	10.71	3 1/8	1	3 1/2	3	3/8	PLRC811T	PLRM811	16000	4:1	64000

Material High Strength Steel
Finish HDG

HD Hole Diameter
SWL Safe Working Load
UML/T Ultimate Mechanical Load in Tension (lbs)