



Hydra-Roll Plant Layout

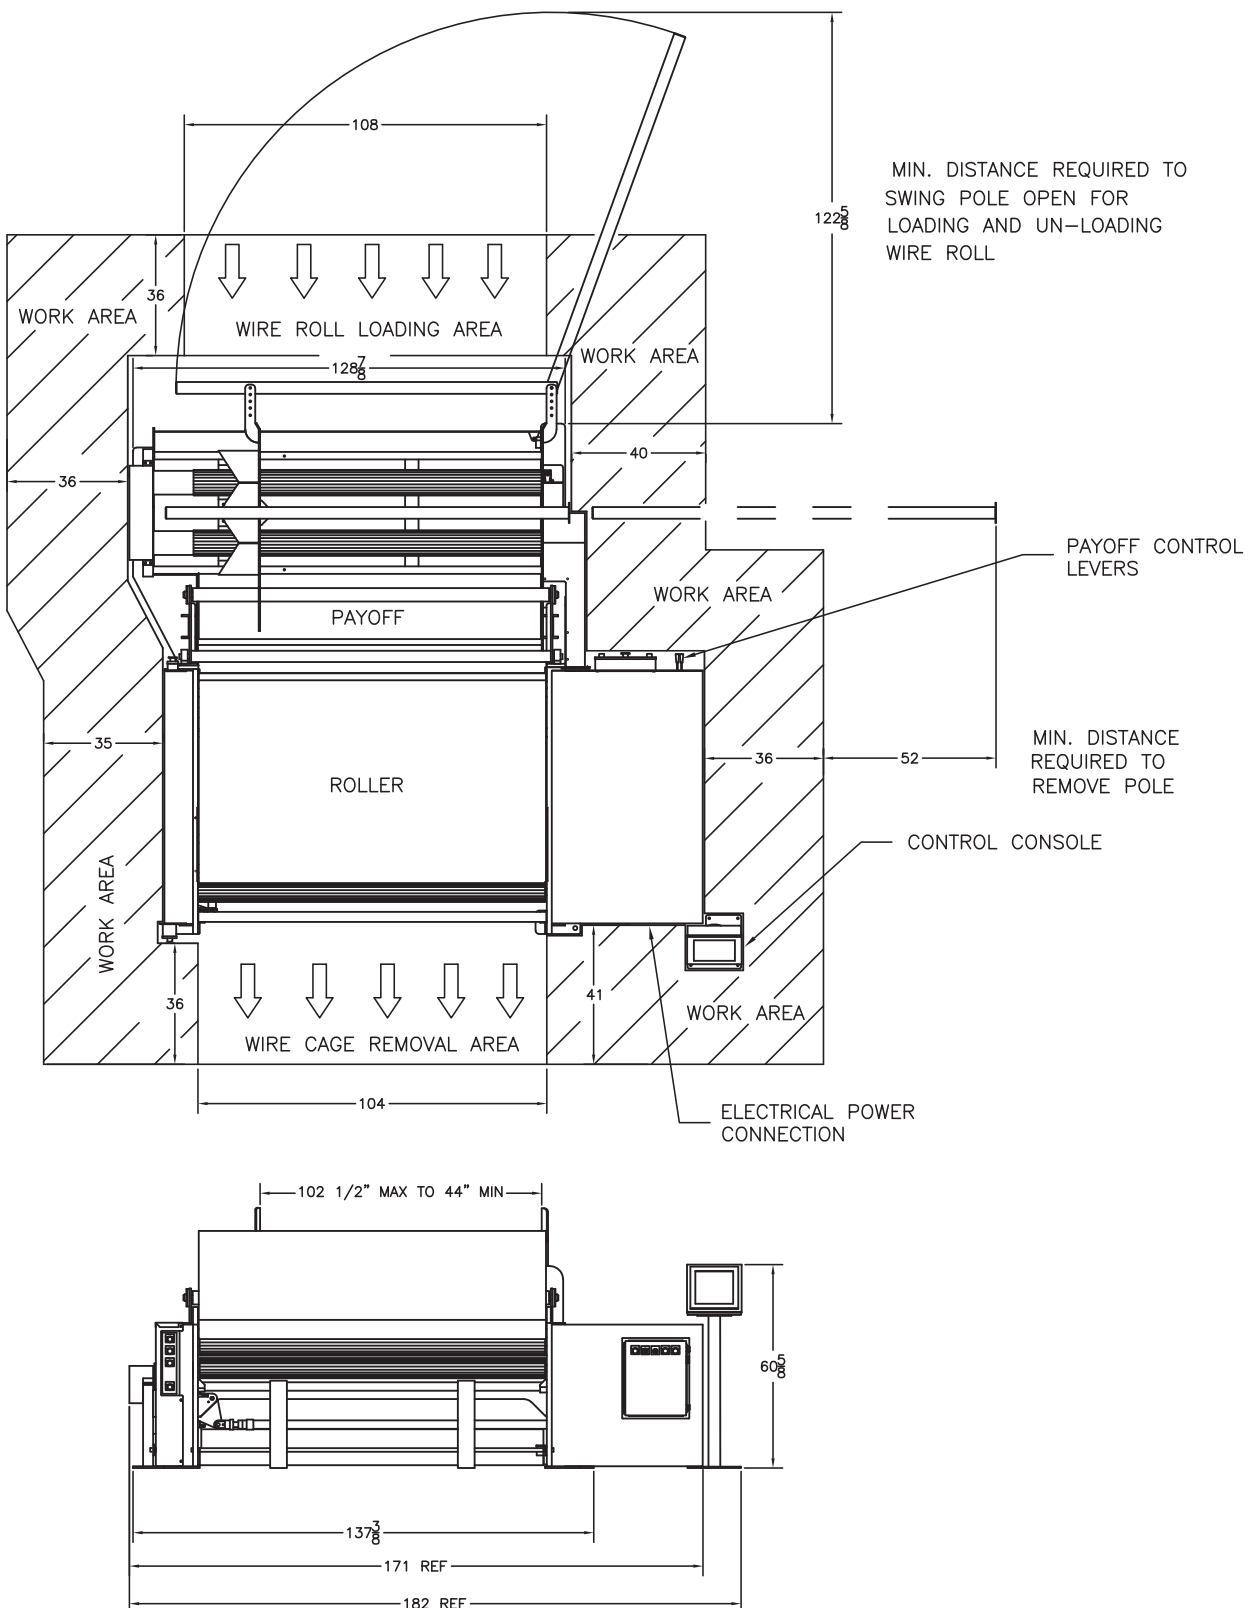

Top View & Front View

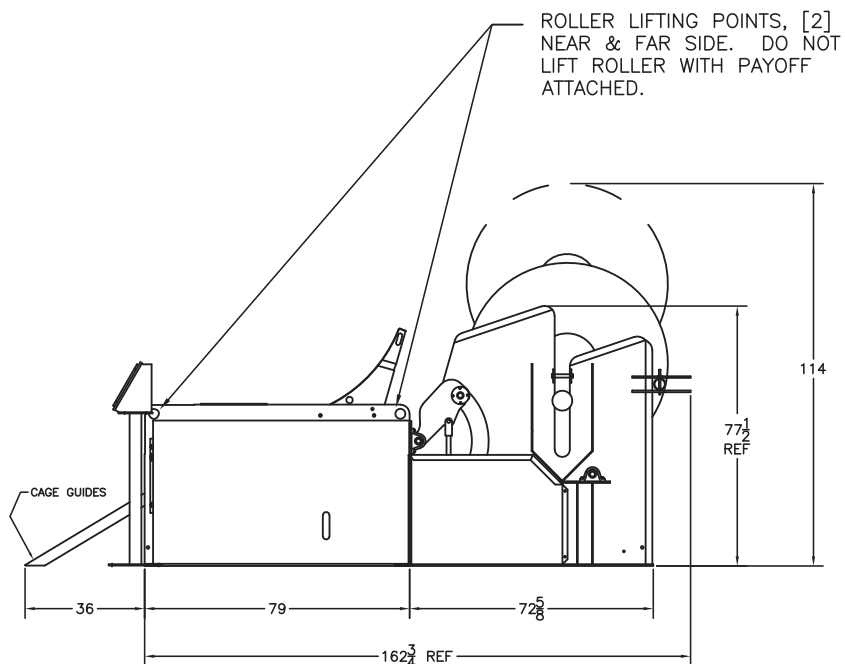

MIN. HEIGHT REQUIRED TO
LOAD OR UNLOAD WIRE ROLL
WHEN USING DROP IN METHOD

Side View

ELECTRICAL POWER REQUIREMENTS

460 VAC 3 PHASE, 40 AMP. (STANDARD)
230 VAC 3 PHASE, 65 AMP. (OPTIONAL)
575 VAC 3 PHASE, 35 AMP. (OPTIONAL)

MACHINE WEIGHT

PAYOFF 3,600 LBS.
ROLLER 19,500 LBS.

FLOOR CONDITIONS

CONCRETE FLOOR LEVEL MUST NOT EXCEED
1/4" PER 10FT. IN ALL DIRECTIONS



Need Help?
Contact our Team:

Technical Service

Phone: 319-394-2270
hawkeyetech@afinitas.com

Parts

Phone: 319-394-2240
hawkeyeparts@afinitas.com